




Stand alone DVR, Full function MPEG4

Model No.: **DAVR-412/DAVR-812/ DAVR-1612**

Features:

- Real time Triplex cost effective DVR system
- Provides clean and high-definition digital images
- Available 2-way Audio conference
- Supports massive storage space
- Built-in Web server as well as proprietary software
- Supports various ways of data backup

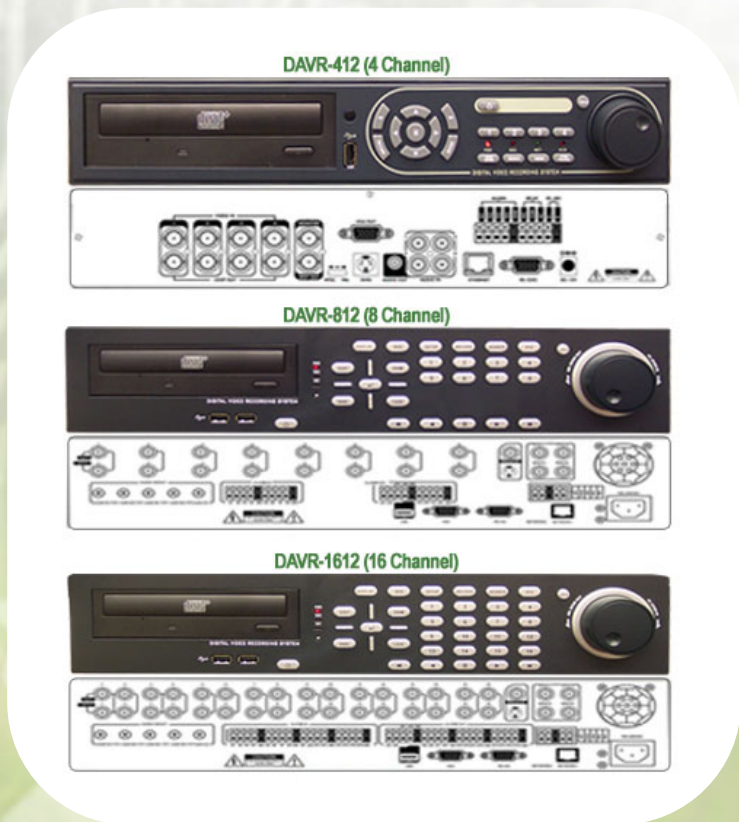

Specifications:

Model No.		DAVR-412	DAVR-812	DAVR-1612
Video in	No. of Channel	4	8	16
	Signal Type	NTSC, PAL		
Audio in	No of Channel	4		
	Signal Level	Line in		
Main display	BNC	Composite(NTSC/PAL)		
	VGA	1024X768 @60Hz		
	Live display speed	480CIF/sec, 400CIF/sec		
	Screen Split	1/ 4/ 9/ 16/ ??		
Spot display	No. of Channel	4		
	Quad spot(Advanced Digital Spot)	No		
Audio output	No of Channel	1		
	Signal Level	Line out		
Sensor In	No. of input	16(1 Relay, 15 Open collector TR)		
	M:N mapping	Yes		
Digital Out	No. of relay	1		
	No. of open collector	15		
User Interface	GUI	Yes(Alpha blending)		
	Control device	Keypad/PTZ Control keyboard/ Remote controller		

Recording	Video CODEC	MPEG-4
	Resolution	CIF(352X240, 352X288), 2CIF(704X240, 704X288), 4CIF(704X480, 704X576)
	Max frame rate	120 CIF/sec, 100 CIF/sec
	Quality	Highest/ High/ Standard/ Low
	Pre-recording	Max 5sec
	Recording type	Continuous/ Motion/ Alarm/ Panic
	Configurable frame rate for each channel	30fps/ 15fps/ 7.5fps/ 4fps/ 2fps/ 1fps
	Channel independent setup	Yes
	Time schedule	Yes
Playback	Speed	x1, x2, x3, x4, x8, x16, x32, x64, x128
	Screen Split	Yes
	Live display speed	240CIF/sec, 200CIF/sec
	Screen Split	1/ 4/ 16
	Synch. with Audio	Yes
Archiving	Storage	CD-ROM/ DVD-ROM/ USB interfaced storage/ Network
	Watermarking	Yes
	File format	AVI
PTZ System	RS-485	Yes
	Watch dog	Yes
	Abnormal shutdown detection	Yes
	System auto recovery	Yes
	Factory default	Yes
	Multi-language	Yes
Network	Physical/Mac Layer	RJ45, Ethernet
	Max no. of connections	16
	DHCP	Yes
	DDNS	Yes
	Two-way network audio	Yes
	Bandwidth Management	Yes
Remote Client	WEB monitoring	Yes
	Remote client S/W	Yes
	Remote setup	Yes
	M:N connection	16 X 16
	email event notification	Yes
Storage	Capacity	not limited
	Storage type	HDD/ ODD/ Flash
	Recording HDD management	Format/ Data locking
	Reording HDD mode	Write once/ Overwriting
Interface	USB port	Front 2, Rear 2
	RS-485	1
	RS-232	1
	RJ-45	1
Event	Source	Sensor In/ Motion detection/ Video Loss/ HDD S.M.A.R.T
	Action	Recording/ Digital out/ email notification/ Log/ Send to remote client SW/ Buzzer out/ Video popup
Search	Calendar search	Yes
	Timeline search	Yes
	Log search	Yes

Design and specifications are subject to change without prior notice.